


APARO®

BEYOND ILLUMINATION

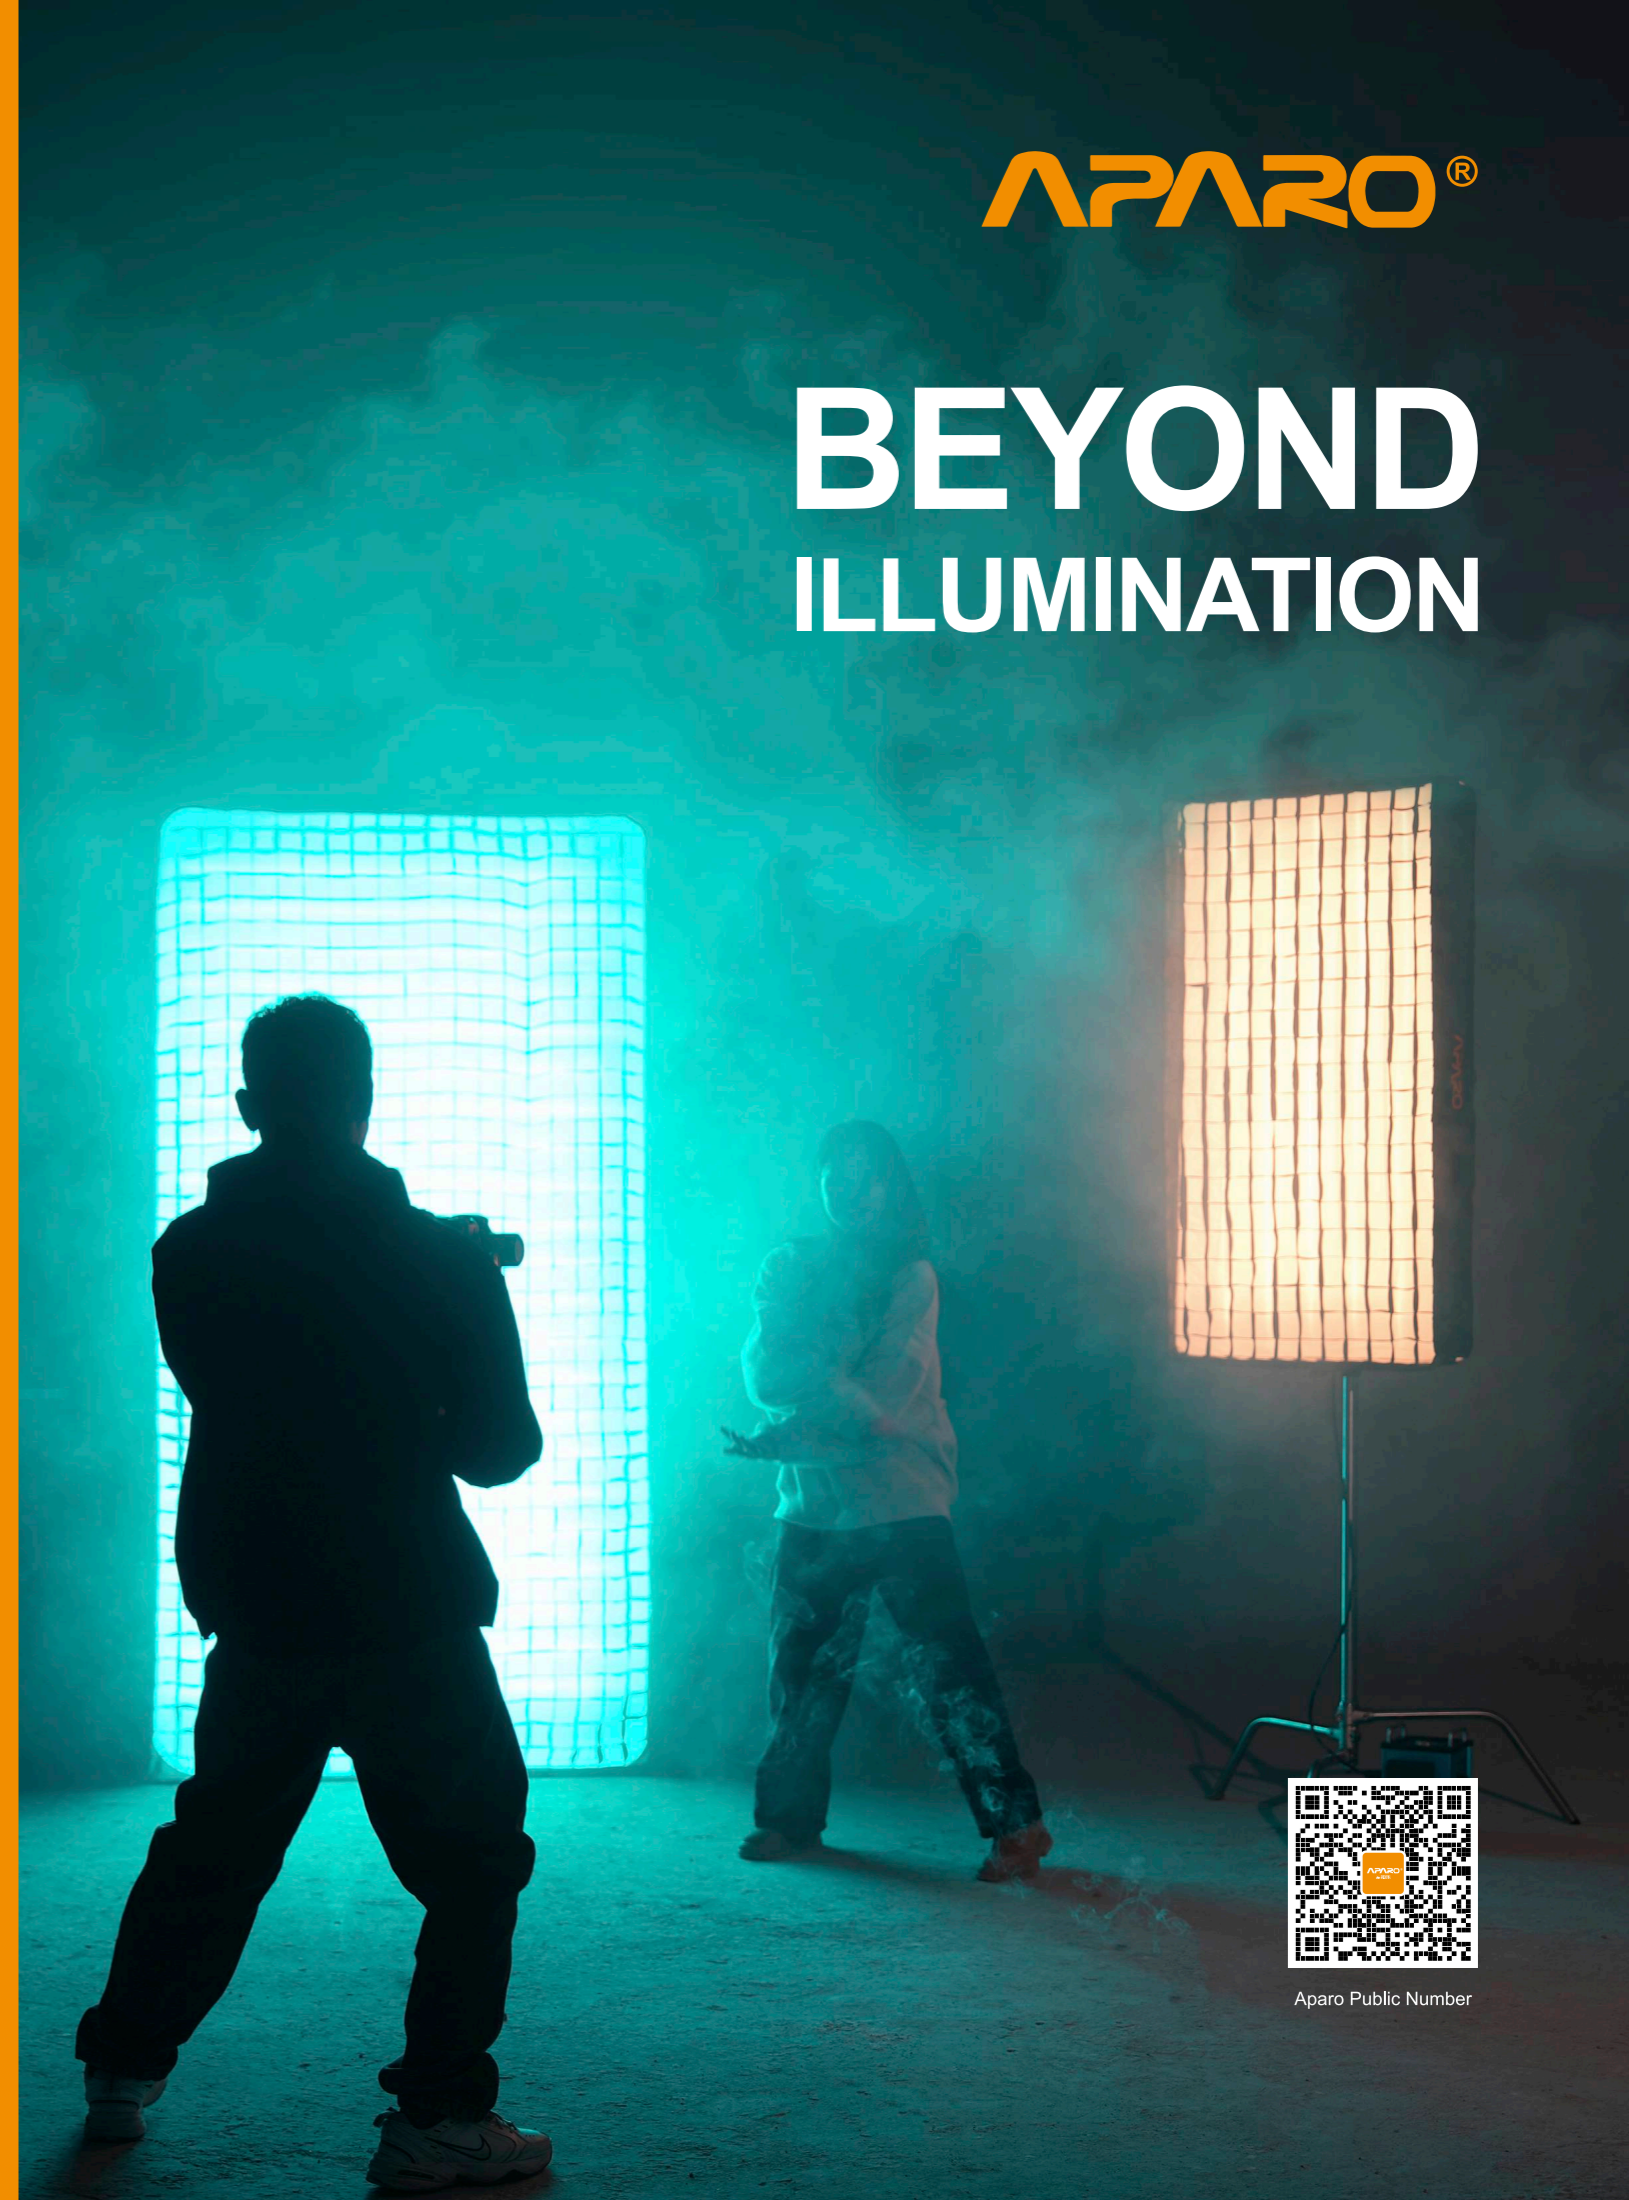

APARO®
www.aparolight.com

DONGGUAN APARO IMAGING
TECHNOLOGIES CO., LTD.

Room 1502, Building 1, No. 1 Jingdong Road,
Fenggang Town, Dongguan, Guangdong, China.

APARO Technologies, INC
9265 Commerce Highway
Pennsauken, NJ 08110

info@aparolight.com

We reserve the rights to make any
changes due to technical developments.

Copyright ,APARO.



Aparo official website



Aparo Public Number



APARO AIR LIGHT

Radi / STANDARD EDITION SERIES

Bi-color Air Light Pipe

Radi-09 Air	4ft / 180W
Radi-09-2 Air	8ft / 360W
Radi-09-4 Air	16ft / 720W
Radi-24-1 Air	4ft / 360W
Radi-24-2 Air	8ft / 720W

RGBWW Air Light Pipe

Radi-09 Pro Air	4ft / 180W
Radi-09-2 Pro Air(CRMX)	8ft / 360W
Radi-24-1 Pro Air(CRMX)	4ft / 360W
Radi-24-2 Pro Air(CRMX)	8ft / 680W

Bi-color Air Light Panel

Radi-12 Air	1x2ft / 100W
Radi-22 Air	2x2ft / 200W
Radi-24 Air	2x4ft / 360W
Radi-44 Air	4x4ft / 680W
Radi-48 Air Ark	4x8ft / 1300W
Radi-88 Air Ark(CRMX)	8x8ft / 2400W

RGBWW Air Light Panel

Radi-12 Pro Air	1x2ft / 100W
Radi-22 Pro Air	2x2ft / 180W
Radi-24 Pro Air(CRMX)	2x4ft / 360W
Radi-44 Pro Air(CRMX)	4x4ft / 680W
Radi-48 Pro Air Ark(CRMX)	4x8ft / 1300W
Radi-88 Pro Air Ark(CRMX)	8x8ft / 2400W

Radi / SE SERIES

Bi-color Air Light Panel

Radi 12Bi SE	1x2ft / 50W
Radi 14Bi SE	1x4ft / 100W
Radi 22Bi SE	2x2ft / 100W
Radi 24Bi SE	2x4ft / 200W
Radi 44Bi SE	4x4ft / 420W
Radi 48Bi SE	4x8ft / 680W
Radi 88Bi SE(CRMX)	8x8ft / 1300W

RGBWW Air Light Panel

Radi 12C SE	1x2ft / 50W
Radi 14C SE	1x4ft / 100W
Radi 22C SE	2x2ft / 100W
Radi 24C SE(CRMX)	2x4ft / 200W
Radi 44C SE(CRMX)	4x4ft / 420W
Radi 48C SE(CRMX)	4x8ft / 680W
Radi 88C SE(CRMX)	8x8ft / 1300W



APARO AIR LIGHT

Radi / STANDARD EDITION SERIES


The RADI Pro Air LED series (Air bi-color/Pro Air full-color) adopts an innovative design of an inflatable softbox and is equipped with the latest SMD LED technology. The LED mat housing is soft, of high quality, and lightweight for easy carrying. The selected LED beads have high brightness, stable color temperature, high color rendering index (CRI) of 96+, energy-saving, and long lifespan. The Pro Air full-color version allows for adjustable RGBWW and GM color tone adjustments, RGB, and HSI color adjustment functions, providing filmmakers with a wider range of creative options.

The built-in color gel mode is equipped with a variety of commonly used color gels, and various light color effects can be quickly created by simply selecting the color number. There are 20 preset scene light effects, such as lightning, screen, and candlelight, each of which

can be freely adjusted for brightness and frequency to better integrate into the environmental atmosphere for efficient shooting.

The all-in-one intelligent control box design integrates power supply and control, with a dual-channel power supply system that can be plugged in and used easily to adapt to changing shooting locations while keeping the lights always online. It supports "DeSal Lite+" mobile app intelligent light control, making it easy to achieve "zero-distance" person-light control. The built-in wireless DMX module can wirelessly connect with a DMX console (while retaining a wired DMX port) to eliminate the constraints of cable clutter and seamlessly connect to the control station. It is suitable for various lighting scenarios such as portrait photography, studio broadcasts, movie shooting, and program interviews.

Radi-09 Air / Radi-09 Pro Air Air Light Pipe

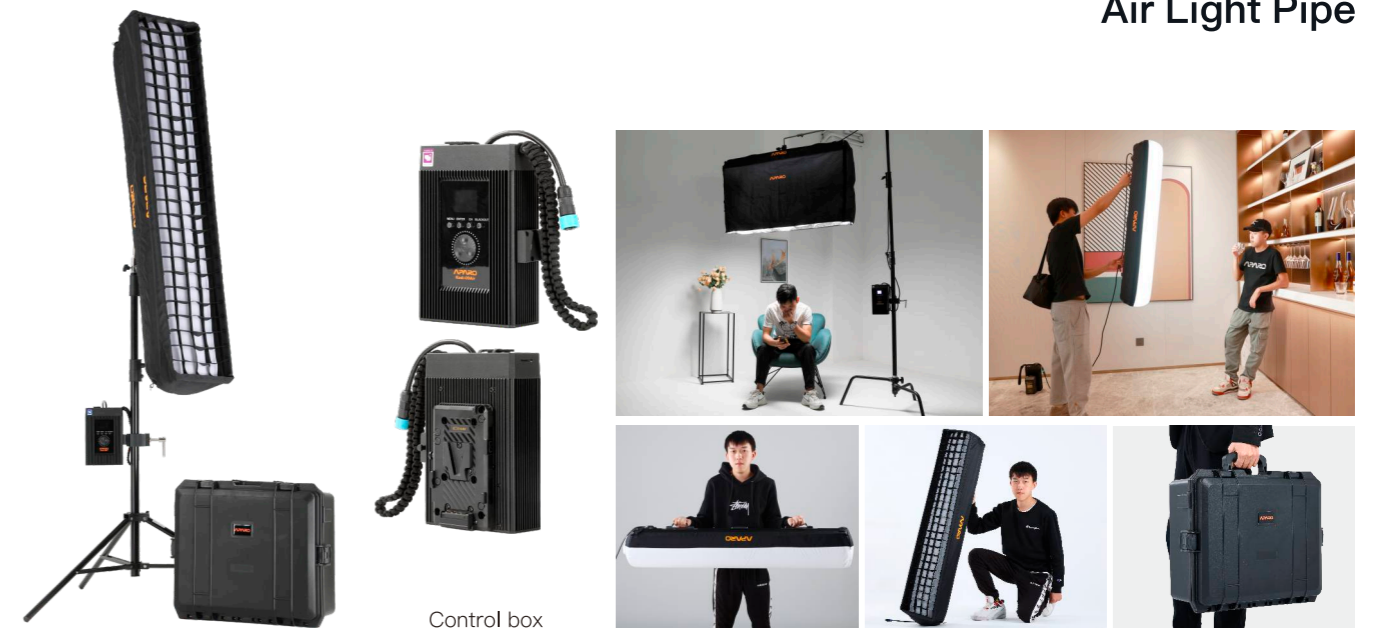

Control box

Content list

Optional Accessories



Light Control box Inflator SPR-200B Extension cable Power cable DMX cable Wirerope CL-40V Paddcloth Carry case Grid Cover cloth

Specifications

Model No.	Radi-09 Air (Bi-color)	Radi-09 Pro Air (RGBWW)
LEDs & Power	400Pcs(White) 400Pcs(Yellow)	400Pcs(White) 400Pcs(Yellow) 400Pcs(White)
Output Wattage	180W	180W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	75°	68°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX
CRI	96	96
Lux(0.5/1/2/3m)	3000K: 7180 / 2210 / 645 / 320 5600K: 8450 / 2610 / 760 / 376 -	2500K: 6090 / 1990 / 585 / 291 5600K: 7640 / 2550 / 753 / 375 9999K: 8580 / 2810 / 829 / 416
Dimensions	Air Light: Φ250×1300mm Control box: 250×145×80mm	Air Light: Φ250×1300mm Control box: 250×145×80mm
Weight	Light: 1.21 Kg Control box: 1.79Kg Air + Diffuser: 0.9Kg	Light: 1.21 Kg Control box: 1.81Kg Air + Diffuser: 0.9Kg

Radi-09-2 Air / Radi-09-2 Pro Air

Air Light Pipe



Air Light



Air Light + Grid



Air Light + Cover cloth



Control box



Content list



Light Control box Inflator SPR-200B Frame Extension cable Power cable CL-40V1 Wirerope Paddcloth Aluminum case Grid Cover cloth

Optional Accessories

Specifications

Model No.	Radi-09-2 Air (Bi-color)	Radi-09-2 Pro Air (RGBWW)
LEDs & Power	800Pcs(White) 800Pcs(Yellow)	800Pcs(White) 800Pcs(Yellow) 800Pcs(White) 800Pcs(Yellow) 800Pcs(White) 800Pcs(Yellow) 800Pcs(White) 800Pcs(Yellow)
Output Wattage	360W	360W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	104°	104°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 5900 / 2420 / 1020 / 547 5600K: 6880 / 2860 / 1230 / 654 6500K: 7200 / 2990 / 1280 / 686	2500K: 5900 / 2420 / 1020 / 547 5600K: 6880 / 2860 / 1230 / 654 9999K: 8200 / 3560 / 1390 / 746
Dimensions	Air Light: Φ250x2500mm Control box: 250x170x195mm	Air Light: Φ250x1300mm Control box: 250x170x195mm
Weight	Light: 1.82 Kg Control box: 3.11Kg Air + Diffusor: 1.63Kg	Light: 1.82 Kg Control box: 3.11Kg Air + Diffusor: 1.63Kg

Radi-09-4 Air

Air Light Pipe



Air Light





Air Light + Grid



Air Light + Cover cloth



Control box

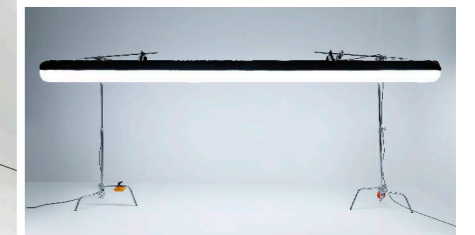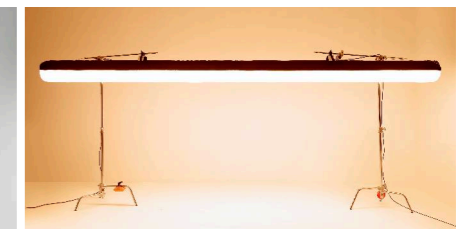

Content list



Light Control box Inflator Wirerope Extension cable Power cable CL-40V1 Padcloth Aluminum case Grid Cover cloth

Optional Accessories

Specifications

Model No.	Radi-09-4 Air (Bi-color)	Model No.	Radi-09-4 Air (Bi-color)
LEDs & Power	800Pcs(White) 800Pcs(Yellow)	Control Function	Switch+knob+key, APP, 2.4G Wireless DMX
Output Wattage	360W x2	CRI	96
Color Temperature	2500K-6500K	Lux(0.5/1/2/3m)	2500K: 7570 / 2970 / 1390 / 830 5600K: 8380 / 3450 / 1620 / 1020 6500K: 8880 / 3610 / 1690 / 1020
Operating Voltage	AC-100V-240V	Dimensions	Air Light: Φ250x5000mm Control box: 250x170x195mm x2
Compatibility	AC POWER Sony V Mount Battery (DC)	Weight	Light: 1.92 Kg x2 Control box: 3.11Kg x2 Air + Diffusor: 3.25Kg
Dimming	0-100% Step-less dimming		
Beam Angle	104°		

Radi-24-1 Air / Radi-24-1 Pro Air

Air Light Pipe



Control box



Air Light



Air Light + Grid



Air Light + Cover cloth



Content list



Light Control box Inflator Padcloth Wirerope Frame Extension cable Power cable CL-40V1 Carry case Grid Cover cloth

Optional Accessories

Specifications


Model No.	Radi-24-1 Air (Bi-color)	Radi-24-1 Pro Air (RGBWW)
LEDs & Power	648Pcs(White) 648Pcs(Yellow)	648Pcs(White) 648Pcs(Yellow) 648Pcs(RGB)
Output Wattage	360W	360W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	70°	70°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	3000K: 4960 / 2490 / 891 / 445 5600K: 5440 / 2740 / 982 / 496 -	2500K: 3750 / 1600 / 533 / 258 5600K: 4080 / 1750 / 584 / 285 -
Dimensions	Air Light: Φ500×1300mm Control box: 250×170×195mm	Air Light: Φ250×1300mm Control box: 250×170×195mm
Weight	Light: 2 Kg Control box: 3.11Kg Air + Diffusor: 2.1Kg	Light: 2.2 Kg Control box: 3.11Kg Air + Diffusor: 2.1Kg

Radi-24-2 Air / Radi-24-2 Pro Air

Air Light Pipe



Control box

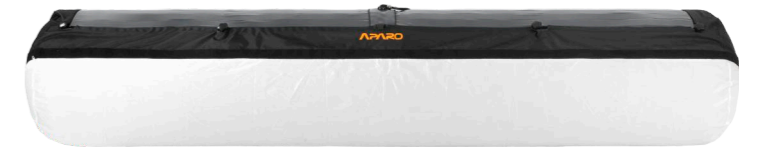

Air Light



Air Light + Cover cloth

Content list



Light Control box Inflator Wirerope Frame Extension cable Power cable CL-40V2 Padcloth Carry case Grid Cover cloth

Optional Accessories

Specifications

Model No.	Radi-24-2 Air (Bi-color)	Radi-24-2 Pro Air (RGBWW)
LEDs & Power	648Pcs x2(White) 648Pcs x2(Yellow)	648Pcs x2(White) 648Pcs x2(Yellow) 648Pcs x2(RGB)
Output Wattage	720W	680W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	106°	106°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 20400 / 5810 / 2170 / 1170 5600K: 23700 / 6580 / 2620 / 1390 6500K: 23900 / 6990 / 2610 / 1400	2500K: 20400 / 5810 / 2170 / 1170 5600K: 23700 / 6580 / 2620 / 1390 6500K: 25596 / 7106 / 2829 / 1501
Dimensions	Air Light: Φ500×2500mm Control box: 335×170×195mm	Air Light: Φ500×2500mm Control box: 335×170×195mm
Weight	Light: 3.88 Kg Control box: 4.42Kg Air + Diffusor: 3.65Kg	Light: 3.88 Kg Control box: 4.42Kg Air + Diffusor: 3.65Kg



Air Light Panel


Radi-12 Air / Radi-12 Pro Air

Air Light Panel



Control box

Content list

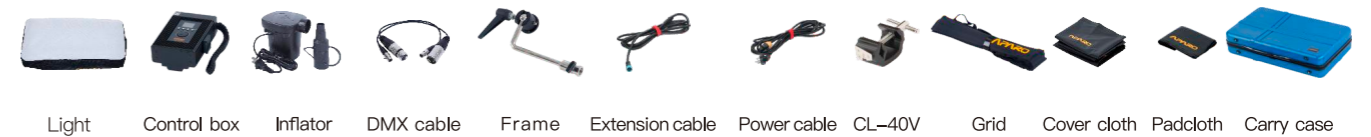

Specifications


Model No.	Rad-12 Air (Bi-color)	Radi-12 Pro Air (RGBWW)
LEDs &Power	240Pcs(White) 240Pcs(Yellow)	240Pcs(White) 240Pcs(Yellow) 240Pcs(RGB)
Output Wattage	100W	100W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	64°	64°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX
CRI	95	95
Lux(0.5/1/2m)	3000K: 7820 / 2280 / 623 5600K: 8160 / 2380 / 655 -	2500K: 5850 / 1550 / 398 5600K: 7240 / 1950 / 504 9999K: 8610 / 2280 / 584
Dimensions	Air Light: 680x380x110mm Control box: 205x144x102mm	Air Light: 680x380x110mm Control box: 205x144x102mm
Weight	Light: 0.56Kg Control box: 1.45Kg Air + Diffusor: 0.61Kg	Light: 0.56Kg Control box: 1.45Kg Air + Diffusor: 0.61Kg

Radi-22 Air / Radi-22 Pro Air

Air Light Panel



Content list

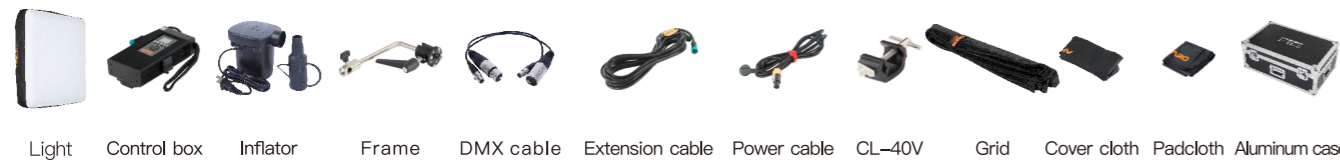


Specifications

Model No.	Radi-22 Air (Bi-color)	Radi-22 Pro Air (RGBWW)
LEDs & Power	480Pcs(White) 480Pcs(Yellow)	324Pcs(White) 324Pcs(Yellow) 324Pcs(RGB)
Output Wattage	200W	180W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	69°	64°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX
CRI	95	95
Lux(0.5/1/2m)	3000K: 17500 / 5860 / 1670 5600K: 18500 / 5920 / 1740 -	2500K: 10700 / 2940 / 756 5600K: 11300 / 3080 / 794 9999K: 12000 / 3290 / 844
Dimensions	Air Light: 695x695x110mm Control box: 255x145x80mm	Air Light: 695x695x110mm Control box: 255x145x80mm
Weight	Light: 1.47Kg Control box: 1.83Kg Air + Diffusor: 0.86Kg	Light: 1.47Kg Control box: 1.83Kg Air + Diffusor: 0.86Kg

Radi-24 Air / Radi-24 Pro Air

Air Light Panel

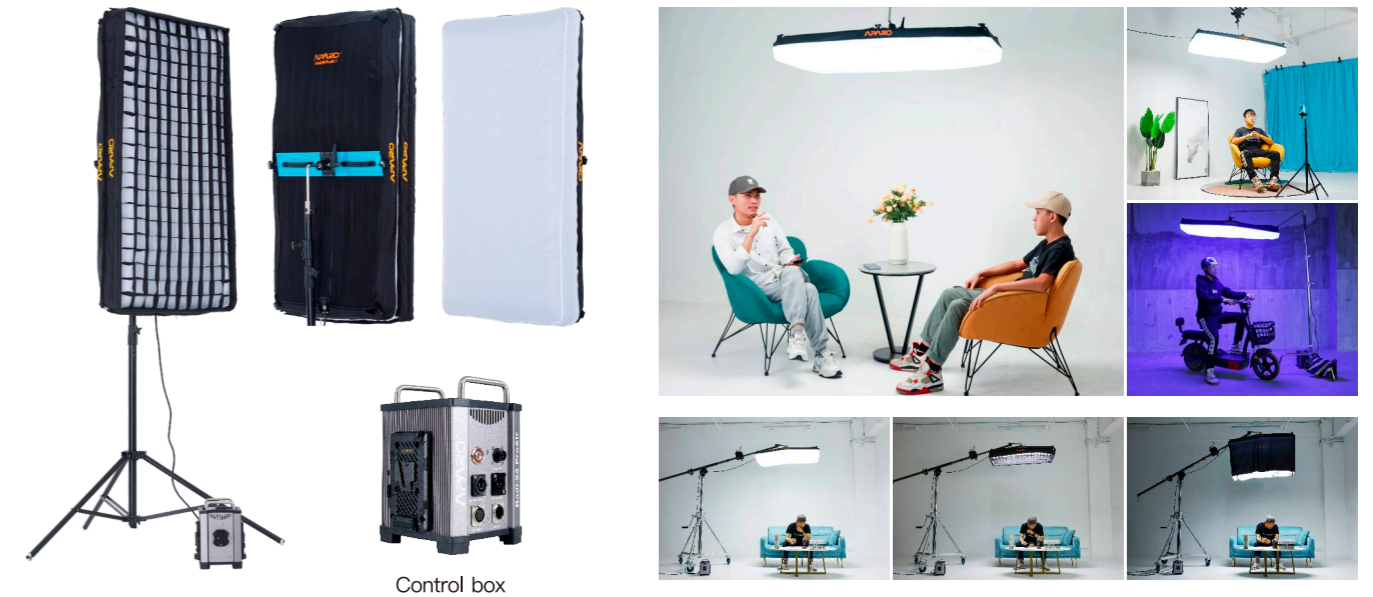

Content list



Specifications

Model No.	Radi-24 Air (Bi-color)	Radi-24 Pro Air (RGBWW)
LEDs & Power	880Pcs(White) 880Pcs(Yellow)	880Pcs(White) 880Pcs(Yellow) 880Pcs(RGB)
Output Wattage	360W	360W
Color Temperature	2500K-6500K	2000K-20000K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	69°	69°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	95	95
Lux(0.5/1/2/3m)	3000K: 20000 / 7800 / 2450 5600K: 20900 / 8000 / 2560 -	2500K: 13500 / 4860 / 1430 / 709 5600K: 16100 / 5920 / 1740 / 870 9999K: 18700 / 6750 / 1970 / 988
Dimensions	Air Light: 1240x625x200mm Control box: 250x170x195mm	Air Light: 1240x625x200mm Control box: 250x170x195mm
Weight	Light: 2.84Kg Control box: 3.15Kg Air + Diffusor: 2.33Kg	Light: 2.84Kg Control box: 3.15Kg Air + Diffusor: 2.33Kg

Radi-44 Air / Radi-44 Pro Air

Air Light Panel



Air Light




Air Light + Grid



Air Light + Cover cloth

Content list

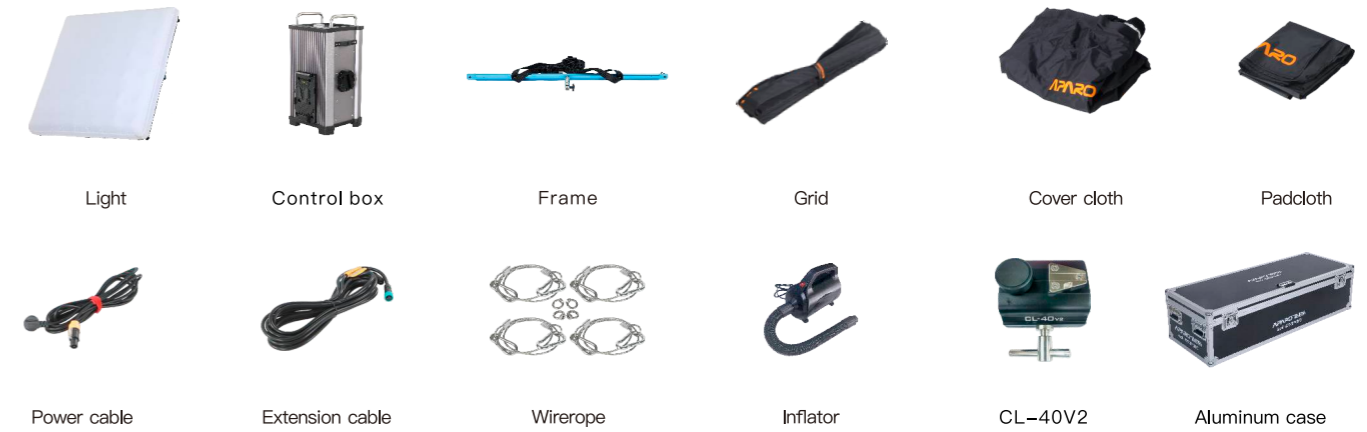

Specifications

Model No.	Radi-44 Air (Bi-color)	Radi-44 Pro Air (RGBWW)
LEDs & Power	1600Pcs(White) 1600Pcs(Yellow)	1600Pcs(White) 1600Pcs(Yellow) 1600Pcs(RGB)
Output Wattage	680W	680W
Color Temperature	2500K-6500K	2000K-20000K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	75°	78°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	95	95
Lux(0.5/1/2/3m)	3000K: 31100 / 13700 / 4580 / 2380 5600K: 33100 / 14700 / 4800 / 2510 -	2500K: 19000 / 8560 / 2720 / 1360 5600K: 21600 / 9550 / 3060 / 1520 9999K: 27500 / 12100 / 3820 / 1910
Dimensions	Air Light: 1170x1160x200mm Control box: 335x170x195mm	Air Light: 1170x1160x200mm Control box: 335x170x195mm
Weight	Light: 3.18Kg Control box: 4.24Kg Air + Diffuser: 4.14Kg	Light: 3.4Kg Control box: 4.42Kg Air + Diffuser: 4.14Kg

Radi-48 Air Ark Radi-48 Pro Air Ark

Air Light Panel

Large soft light
Adjustable color temperature
APP+ wireless DMX dimming
9/20 scene lighting effects



Air Light



Air Light + Grid



Air Light + Cover cloth




Front



Side



Back

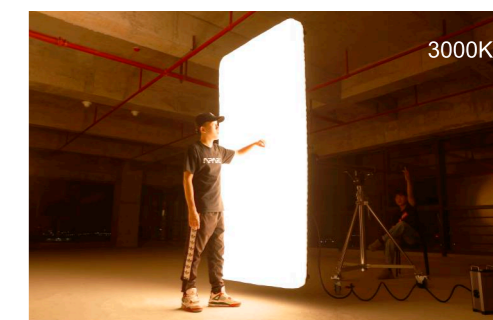

3000K



Control box



5600K

Content list




Specifications

Model No.	Radi-48 Air Ark (Bi-color)	Radi-48 Pro Air Ark (RGBWW)
LEDs & Power	3520Pcs(White) 3520Pcs(Yellow)	3520Pcs(White) 3520Pcs(Yellow) 3520Pcs(RGB)
Output Wattage	1300W	1300W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	81°	81°
Control Function	Switch+knob+key, APP, 2.4G Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	95	95
Lux(0.5/1/2/3m)	3000K: 28100 / 15000 / 6000 / 3270 5600K: 31100 / 16100 / 6510 / 3500 -	2500K: 26100 / 16800 / 6520 / 3600 5600K: 34400 / 21400 / 8420 / 4650 9999K: 30600 / 19400 / 7500 / 4160
Dimensions	Air Light: 2400x1240x200mm Control box: 365x180x160mm	Air Light: 2400x1240x250mm Control box: 365x180x160mm
Weight	Light: 5.82Kg Control box: 5.51Kg Air + Diffusor: 7.44Kg	Control box: 5Kg Light + Air + Diffusor: 9.4Kg



Radi-88 Air / Radi-88 Pro Air

Air Light Panel

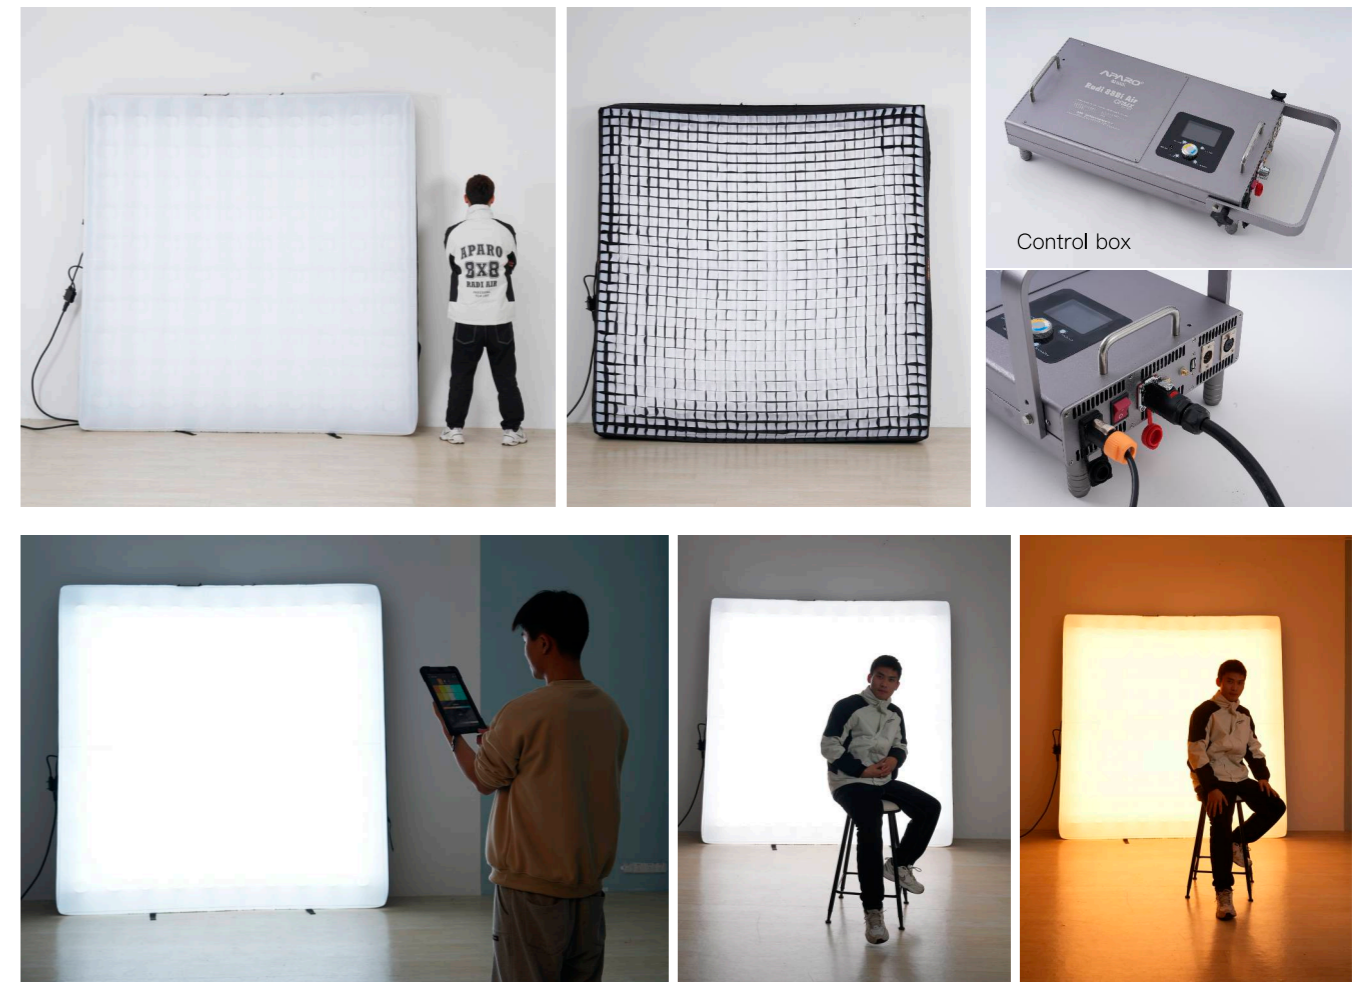

Specifications

Model No.	Radi-88 Air Ark (Bi-color)	Radi-88 Pro Air Ark (RGBWW)
LEDs & Power	7040Pcs(White) 7040Pcs(Yellow)	7040Pcs(White) 7040Pcs(Yellow) 7040Pcs(RGB)
Output Wattage	2400W	2400W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER	AC POWER
Dimming	0-100%Step-less dimming	0-100% Step-less dimming
Beam Angle	101°	101°
Control Function	Switch+knob+key, APP, DMX,CRMX	Switch+knob+key, APP, DMX,CRMX
CRI	95	95
Lux(0.5/1/2/3m)	2500K: 31100 / 22500 / 11600 / 6200 5600K: 38100 / 28400 / 14400 / 7910 6500K: 37200 / 28200 / 13800 / 7760	2500K: 23300 / 16870 / 8700 / 4650 5600K: 28500 / 21300 / 10800 / 5900 6500K: 27900 / 21100 / 10300 / 5800
Dimensions	Air Light: 2400×2400×240mm Control box: 548×286×162mm	Air Light: 2400×2400×240mm Control box: 548×286×162mm
Weight	Control box: 8.6Kg Light + Air + Diffusor: 14.67Kg	Control box: 8.6Kg Light + Air + Diffusor: 14.67Kg

Radi / SE SERIES


Professional film and television air cushion fill light



50W power
680x380x110mm
Radi 12Bi SE
2500-6500K
Radi 12C SE
2500-9999K, RGBWW



100W power
1220x450x110mm
Radi 14Bi SE
2500-6500K
4590Lux (5600K/0.5m)
Radi 14C SE
2500-9999K, RGBWW

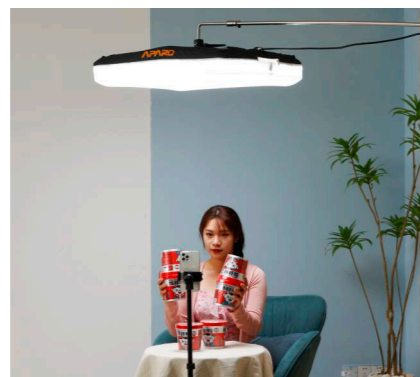


100W power
695x695x110mm
Radi 22Bi SE
2500-6500K
Radi 22C SE
2500-9999K, RGBWW



200W power
1240x625x200mm
Radi 24Bi SE
2500-6500K
10400Lux (5600K/0.5m)
Radi 24C SE(CRMX)
2500-9999K, RGBWW
9240Lux (5600K/0.5m)



420W power
1240x1240x250mm
Radi 44Bi SE
2500-6500K
18800Lux (5600K/0.5m)
Radi 44C SE(CRMX)
2500-9999K, RGBWW
20800Lux (5600K/0.5m)

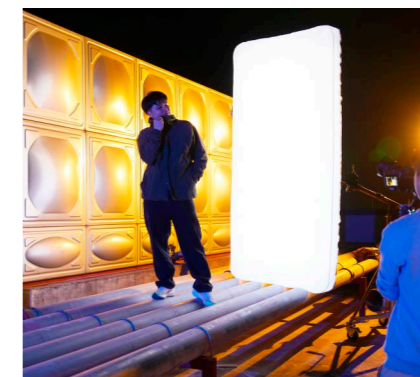

680W power
2400x1240x250mm
Radi 48Bi SE
2500-6500K
17800Lux (5600K/0.5m)
Radi 48C SE(CRMX)
2500-9999K, RGBWW
14200Lux (5600K/0.5m)



1300W power
2400x2400x240mm
Radi 88Bi SE(CRMX)
2500-6500K
Radi 88C SE(CRMX)
2500-9999K, RGBWW

Radi 14Bi SE / Radi 14C SE

Air Light Panel(SE Series)



Control box

Specifications

Model No.	Radi 14Bi SE (Bi-color)	Radi 14C SE (RGBWW)
LEDs & Power	320Pcs(White) 320Pcs(Yellow)	320Pcs(White) 320Pcs(Yellow) 320Pcs(RGB)
Output Wattage	100W	100W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	66°	66°
Control Function	Switch+knob+key, APP, Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 3810 / 1280 / 374 / 189 5600K: 4590 / 1590 / 469 / 237 6500K: 4640 / 1620 / 477 / 242	2500K: 3048 / 1024 / 299 / 151 5600K: 3672 / 1272 / 375 / 190 9999K: 3712 / 1296 / 382 / 193
Dimensions	Air Light: 1220x450x110mm Control box: 205x145x80mm	Air Light: 1220x450x110mm Control box: 205x145x80mm
Weight	Control box: 1.46Kg Light + Air + Diffusor: 3.41Kg	Control box: 1.46Kg Light + Air + Diffusor: 3.41Kg

Radi 24Bi SE / Radi 24C SE

Air Light Panel(SE Series)



Control box

Content list




Specifications

Model No.	Radi 24Bi SE (Bi-color)	Radi 24C SE (RGBWW)
LEDs & Power	480Pcs(White) 480Pcs(Yellow)	480Pcs(White) 480Pcs(Yellow) 480Pcs(RGB)
Output Wattage	200W	200W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	68°	68°
Control Function	Switch+knob+key, APP, Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 9270 / 3330 / 1010 / 488 5600K: 10400 / 3850 / 1150 / 566 6500K: 10600 / 3900 / 1200 / 589	2500K: 7940 / 2970 / 868 / 443 5600K: 9240 / 3480 / 1020 / 520 9999K: 10700 / 4000 / 1170 / 598
Dimensions	Air Light: 1240x625x200mm Control box: 250x170x195mm	Air Light: 1240x1160x200mm Control box: 250x170x195mm
Weight	Control box: 3.14Kg Light + Air + Diffusor: 3.1Kg	Control box: 3.14Kg Light + Air + Diffusor: 4.74Kg

Radi 44Bi SE / Radi 44C SE

Air Light Panel(SE Series)

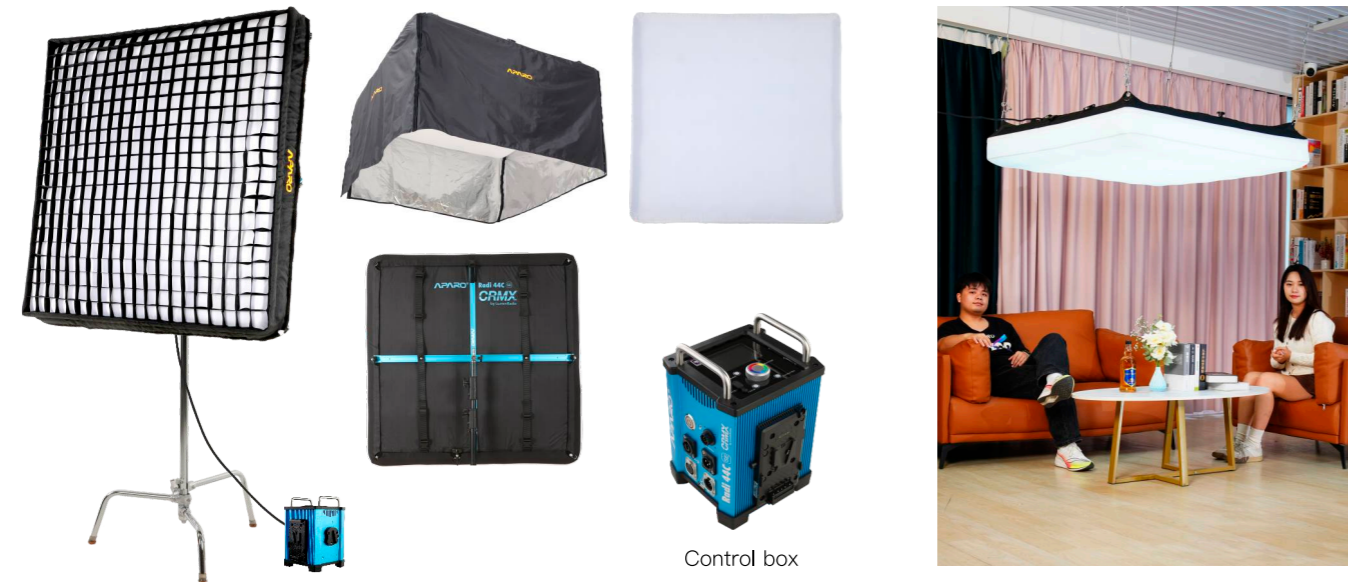

Content list



Specifications

Model No.	Radi 44Bi SE (Bi-color)	Radi 44C SE (RGBWW)
LEDs &Power	1040Pcs(White) 1040Pcs(Yellow)	1040Pcs(White) 1040Pcs(Yellow) 1040Pcs(Blue) 1040Pcs(Red)
Output Wattage	420W	420W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	68°	80°
Control Function	Switch+knob+key, APP, Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 15600 / 6720 / 2150 / 1080 5600K: 18800 / 8160 / 2640 / 1310 6500K: 18800 / 8310 / 2670 / 1340	2500K: 16900 / 7060 / 2280 / 1110 5600K: 20800 / 8690 / 2790 / 1380 9999K: 21900 / 9450 / 3050 / 1480
Dimensions	Air Light: 1170x1160x250mm Control box: 250x170x195mm	Air Light: 1170x1160x250mm Control box: 250x170x195mm
Weight	Control box: 3.29Kg Light + Air + Diffusor: 3.47Kg	Control box: 3.32Kg Light + Air + Diffusor: 3.47Kg

Radi 48Bi SE / Radi 48C SE

Air Light Panel(SE Series)



Content list




Specifications

Model No.	Radi 48Bi SE (Bi-color)	Radi 48C SE (RGBWW)
LEDs &Power	1760Pcs(White) 1760Pcs(Yellow)	1760Pcs(White) 1760Pcs(Yellow) 1760Pcs(Blue) 1760Pcs(Red)
Output Wattage	680W	680W
Color Temperature	2500K-6500K	2500K-9999K
Operating Voltage	AC-100V-240V	AC-100V-240V
Compatibility	AC POWER Sony V Mount Battery (DC)	AC POWER Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	106°	106°
Control Function	Switch+knob+key, APP, Wireless DMX	Switch+knob+key, APP, 2.4G Wireless DMX/CRMX
CRI	96	96
Lux(0.5/1/2/3m)	2500K: 14500 / 8160 / 2970 / 1590 5600K: 17800 / 9750 / 3590 / 1920 6500K: 17400 / 9660 / 3640 / 1950	2500K: 13700 / 7680 / 3210 / 1720 5600K: 14200 / 7970 / 3310 / 1780 9999K: 16900 / 9650 / 4060 / 2160
Dimensions	Air Light: 2400x1240x250mm Control box: 335x170x195mm	Air Light: 2400x1240x250mm Control box: 335x170x195mm
Weight	Control box: 4.4Kg Light + Air + Diffusor: 6.39Kg	Control box: 4.43Kg Light + Air + Diffusor: 10.8Kg



A1 PIXEL LED LIGHT

Full Pixel Control RGBWW LED Light

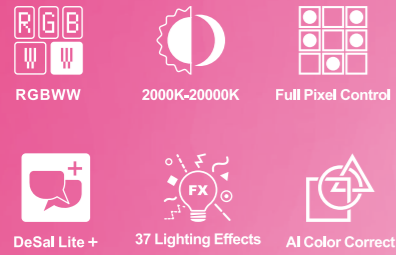

Introducing the APARO A1 Pixel RGBWW LED Light, a beacon of innovation in the world of illumination. This extraordinary lighting solution combines style with functionality, offering an impressive array of features to redefine your lighting experience. With full-color gradient capabilities, color adjustability from 2000K to 20000K, and 37 captivating lighting effects, the A1 allows you to paint your surroundings with a rich

spectrum of hues and create the perfect ambiance for any occasion. Plus, with Bluetooth APP control through DeSal Lite+, you can effortlessly customize brightness and lighting effects from your smartphone. The A1's pixel-level control and AI color correction ensure precision and consistency, making it the ultimate choice for those seeking brilliance in lighting.

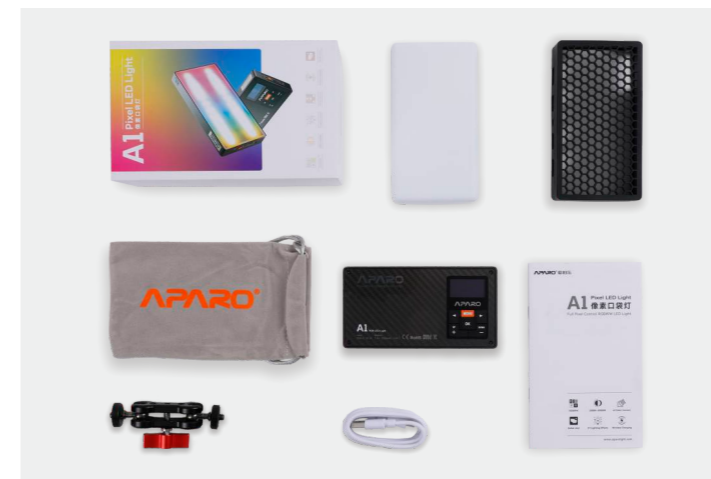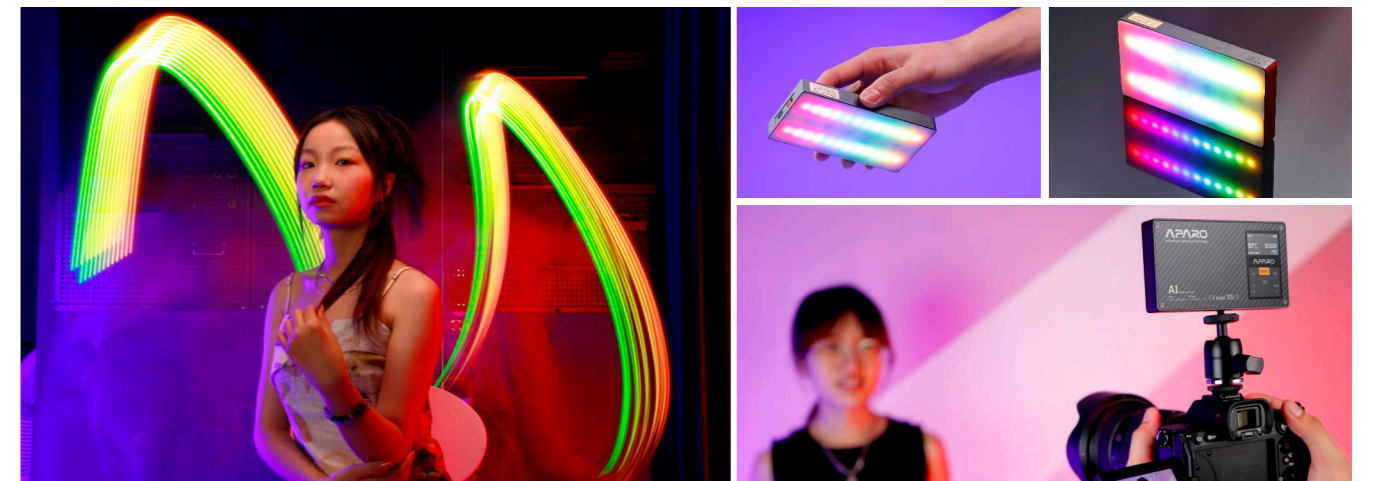

List of items

BG1

(Optional Accessories)

2.4G Wireless DMX Transmitter
DeSal Lite+ Bluetooth Extender




Specifications

Model No.	A1
LEDs & Power	24Pcs(White) 24Pcs(Yellow) 24Pcs(RGB)
Output Wattage	10W
Color Temperature	2000K-20000K
Dimming	0-100%(0.5% per adjustment)
Control Function	Switch+key, APP
CRI	95
Lux(0.5/1/2/3m)	2500K 100% : 809 / 151 / 34 3200K 100% : 1086 / 201 / 45 5600K 100% : 1283 / 239 / 54 20000K 100% : 1100 / 204 / 46
Input	Type-C 5V2A-5V3A, Wireless Charging
Battery Capacity	7.4V 2050mA
Battery life 5600K/100%	120min(Normal) 150min(Economy) 210min(Super Economy) 350min(Deep Economy)
Charging and DMX port	Type-C
Dimensions	132x70x16mm
Weight	200g

Tank 80B/Tank 80C

OUTDOOR FILL LIGHT

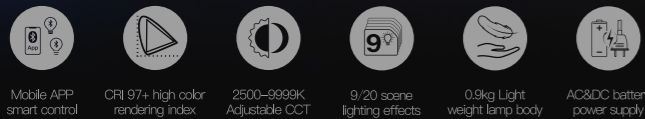

The Aparo Tank 80B is a bi-color COB with a power output of 80W. It features a compact and modern casing, and is capable of operating on both AC and DC power sources, making it suitable for use in studios and outdoor shooting. The Tank 80B uses a small adaptor bayonet and provides sturdy soft light accessory installation capabilities, which are essential for any professional use. The new COB LED chip provides high color rendering accuracy of CRI 97+ and provides up to 20800 LUX of daylight illuminance at a distance of 1 meter.

The Tank 80B has a built-in Bluetooth APP control function, which can be used with the DeSal Lite+ APP to achieve remote control up to 20 meters away (control range can be further if there is no interference),

making it easier for the main light to communicate with fill or backlight. The Tank 80B also has different lighting scene effects, such as lightning, flashing, candlelight, TV, paparazzi, etc., making it easier to create special scene effects in movies than ever before.

In order to offer a more diverse lighting experience to the vast number of video creators, we have launched another full RGBWW version, Tank 80C, based on the bi-color version. It not only has all the functions of Tank 80B, but also adds 20 more lighting scene effects, as well as RGB, HSI, and color gels modes, which can achieve full color lighting effects without the need for physical color gels, allowing you to create endless possibilities in your lighting arrangements.

Tank 80B / Tank 80C

80W Constant power



List of items



Optional Accessories



(V/NP) PD-BW PD-OC01 PD-DB150 PD-BOS PDS-45 PD-60 PD-70

Specifications

Model No.	Tank 80B (Bi-color)	Tank 80C (RGBWW)
LEDs & Power	1Pce x 80W(White) + 1Pce x 80W(Yellow)	1Pce x 80W(White) + 1Pce x 80W(Yellow) + 1Pce x 90W(RGB)
Output Wattage	80W	80W
Color Temperature	2500K-9999K	2500K-9999K
Operating Voltage	DC-16.8V 8A	DC-16.8V 8A
Compatibility	AC Adaptor Sony V Mount Battery (DC)	AC Adaptor Sony V Mount Battery (DC)
Dimming	0-100% Step-less dimming	0-100% Step-less dimming
Beam Angle	29°	26°
Control Function	Switch+knob+key, APP	Switch+knob+key, APP
CRI	97	96
Lux(0.5/1/2m)	2500K: 118000 / 14500 / 2520 5600K: 171000 / 20800 / 3700 -	2500K: 49100 / 9720 / 2100 5600K: 63100 / 12600 / 2680 9999K: 69800 / 13600 / 2760
Dimensions	235x145x95mm	256x145x95mm
Weight	Light : 0.9 Kg AC Adaptor : 0.56Kg	Light : 0.98 Kg AC Adaptor : 0.56Kg



Meteor


- 
 RGBWW
- 
 2000K-20000K
- 
 Pixel light control
- 
 DMX/RDM
- 
 CRMX
- 
 300m wireless control
- 
 AC&DC
- 
 DeSal Lite+
- 
 Luminair

Meteor Pixel Stick Light

The new Meteor series pixel sticks are built with APARO's latest RGBCW technology, which can perform accurate bi-color light source from tungsten to daylight (CCT), HSI & RGB, and tons of different lighting scene effects, including RGBCW matrix effect. It can be connected with DeSal Lite+ Bluetooth APP for remote lighting control, IOS & Android APP are available to download on Apple APP Store and Playstore.


Considering the flexibility and mobility during use, Meteor 60 comes with a built-in battery (7.4V/3200MAH), which is suitable for outdoor use. Meteor 60 has been tested to last up to two hours of continuous use at full power output.

Meteor pixel sticks (Meteor 60, Meteor 120, Meteor 240) are available in three sizes, 2 feet/20W, 4 feet/40W, 8 feet/80W, all three models are made of durable aluminum housing to provide long lasting fixture protection. Meteor is also equipped with mini XLR input and output ports to support DMX to meet different lighting control needs.

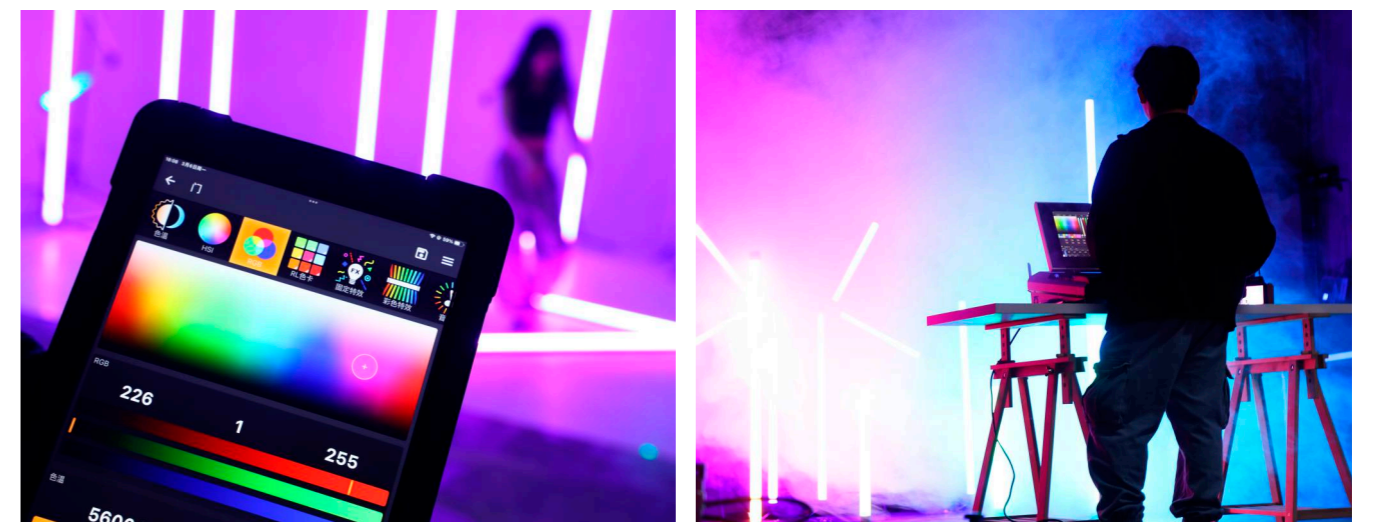

Meteor / Meteor Series


Wireless intelligent full-pixel light tube - more powerful, more practical.

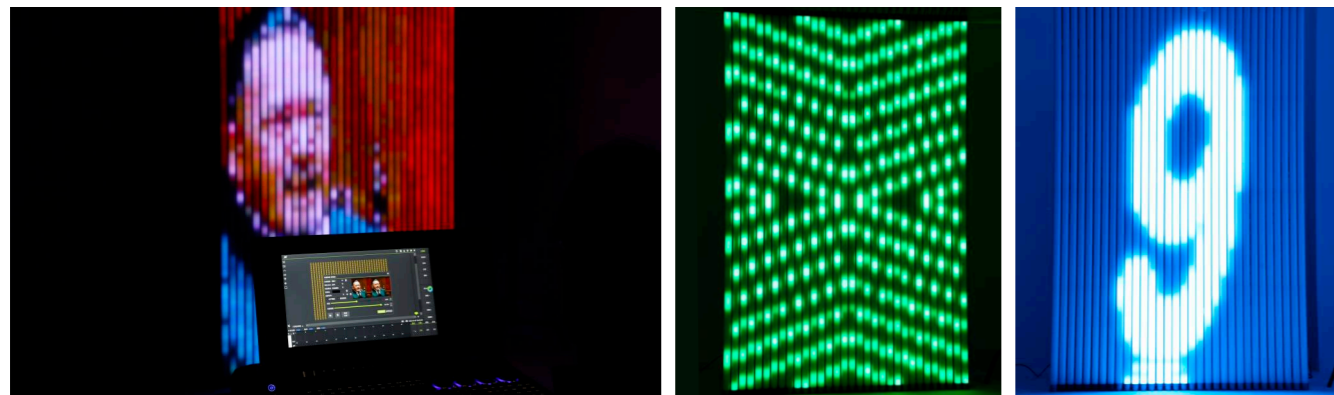

1、 1 pixel/cm


The Meteor series pixel light tube uses RGBWW five-color smart mixed light beads, full-pixel design, precise point control, and opens a new era of point light source control for film and television lighting.

The highest controllable pixels are 30 for 1 foot, 60 for 2 feet, 120 for 4 feet, and 240 for 8 feet.

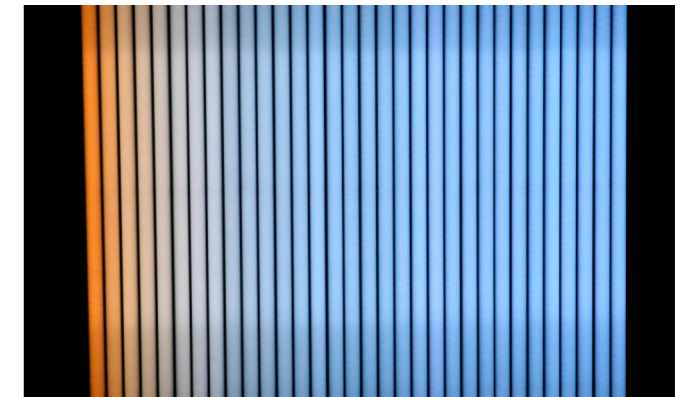

2、 2000-20000K wide range CCT

Ultra-wide adjustable color temperature, 25K/level accurate color temperature adjustment, AI mixed light, intelligent correction, support for thousand-level dimming, and support for linear, S-line, logarithmic, and exponential brightness dimming modes.


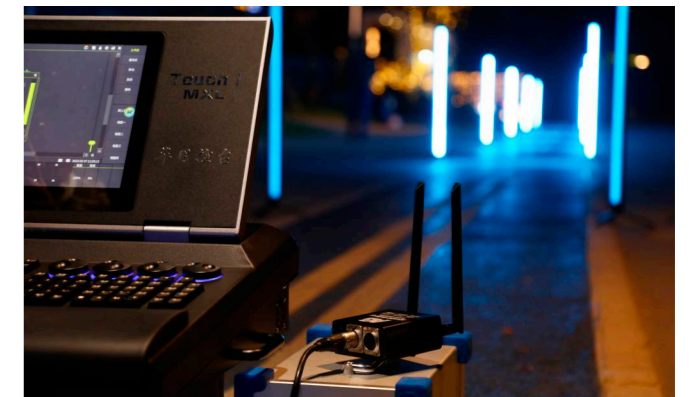


3、 Full-color light effect (21x scene effects + 16x pixel effects)

Built-in 21x lighting effects and 16 pixel effects, support fast adjustment of the brightness, speed, hue, color temperature, direction, mirror direction, echo, tiling, and running light time setting for each lighting effect.

4、 300m wireless control

Through the APARO AG1 Galaxy wireless transmitter, wireless control can be achieved within a range of 300 meters. By installing our AG1 on the lamp to receive mode, the wireless distance can be doubled.

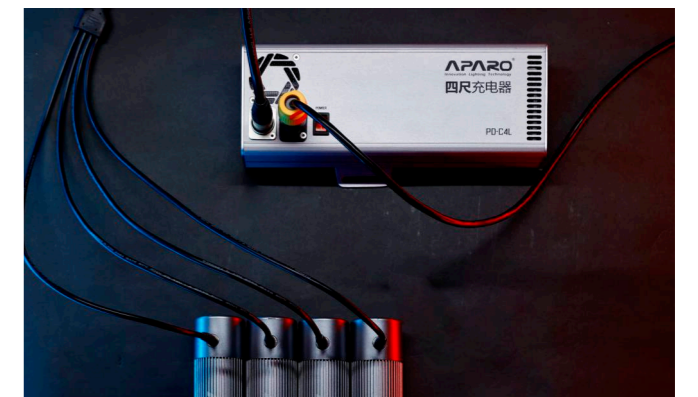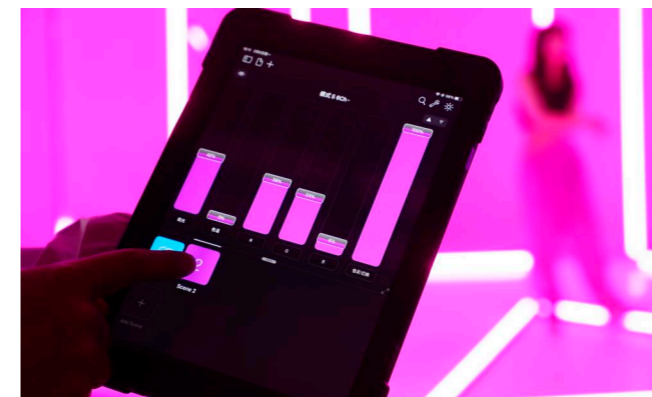

5、 Dual Bluetooth APP intelligent control


Dual Bluetooth wireless control system, can wirelessly control the light through downloading DeSal Lite+ free App, and can also control Meteor60L, 120L, and 240L through purchasing the Luminair App.

6、 Super long intelligent endurance, one to four power supply + 1.5 hours efficient charging


Built-in car-grade large-capacity potassium battery, four power consumption modes can be selected, providing long-term endurance for creators. The dedicated one to four efficient power supply can simultaneously charge four light tubes or plug in to use.

2.4G Wireless DMX+Bluetooth


Meteor 30/60/120/240




Meteor 30 | **1ft/10W**



Meteor 60 | **2ft/20W**



Meteor 120 | **4ft/40W**



Meteor 240 | **8ft/80W**

LumenRadio CRMX+Bluetooth

Meteor 60L/120L/240L



Meteor 60L | **2ft/20W**



Meteor 120L | **4ft/40W**



Meteor 240L | **8ft/80W**

Infinite patchwork series

Meteor 60LS/120LS

Meteor 60LS | **2ft/20W**



Meteor 120LS | **4ft/40W**



APARO Galaxy

Wireless transmitter and receiver




APARO Galaxy AG1
(Optional Accessories)



The APARO Galaxy AG1 wireless system is a new CRMX wireless intelligent transmitter and receiver with a built-in Lumenradio wireless module. It can be adjusted to TX transmission or RX reception and can control other brands of lights with Lumenradio wireless modules. Lights without built-in wireless chips can be connected to the APARO Galaxy AG1 through the DMX interface to achieve wireless light control when the RX reception mode is selected. The APARO Galaxy AG1 wireless transmitter can achieve a point-to-point (TX & RX) effective wireless distance of 600 meters, and can achieve one-way 512DMX. If more wireless channel control of lights is required, the APARO Galaxy AG16 can be considered.

With the support of the APARO Galaxy wireless transmitter and the APARO ANT512 console, Meteor can easily be applied on any large lighting scale.

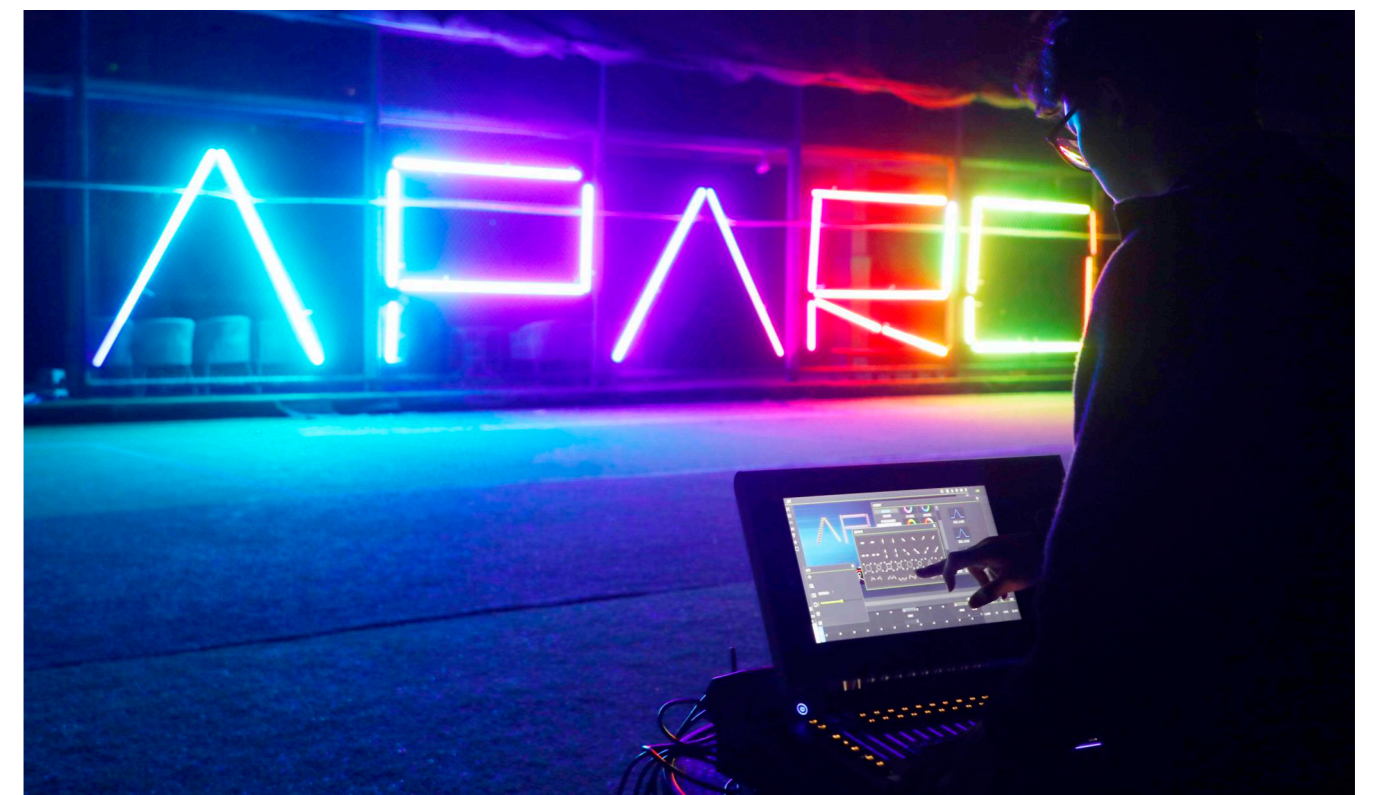



Meteor 60/60L/60LS 2ft

List of items



Meteor 60 x1


Pouch x1

USB charging cable x1

Manual x1




Four-lights charger

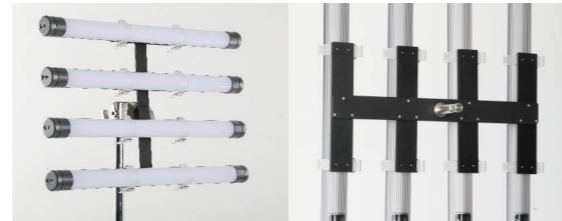

Meteor 120/120L/120LS Four-lights kit | 4ft



Content list

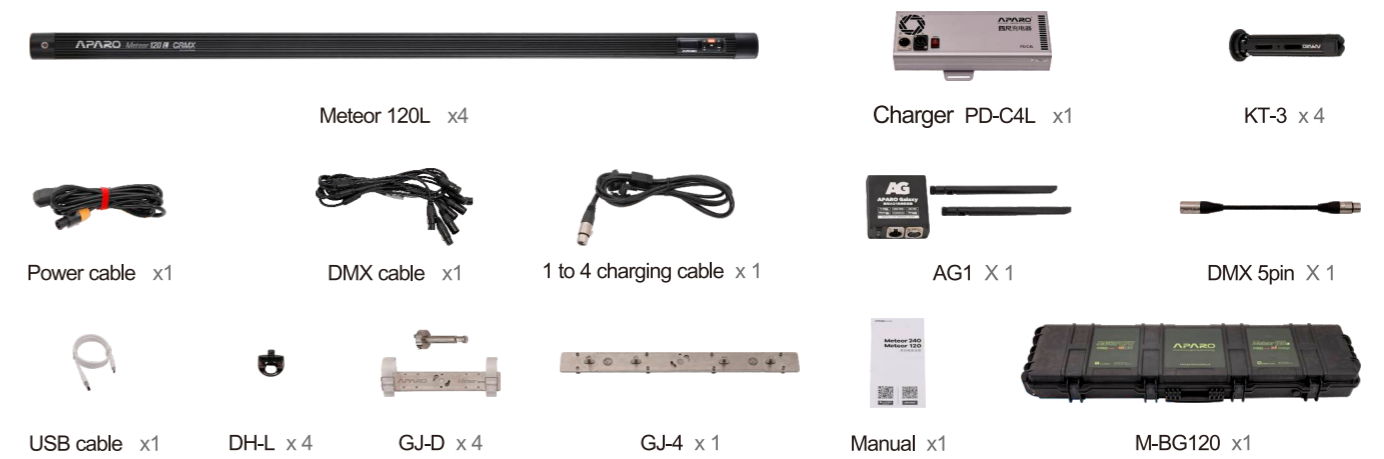

Meteor 120L x4

Charger PD-C4L x1

KT-3 x4

Power cable x1

DMX cable x1

1 to 4 charging cable x1

AG1 X1

DMX 5pin X1

USB cable x1

DHL x4


GJ-D x4

GJ-4 x1


Manual x1

M-BG120 x1

Meteor 240/240L 8ft

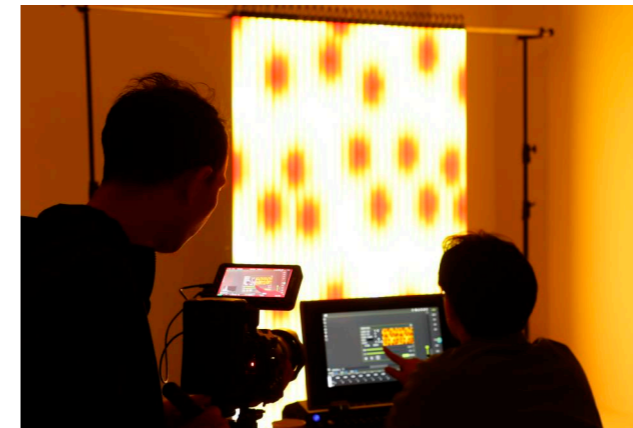

Meteor 240 Charger

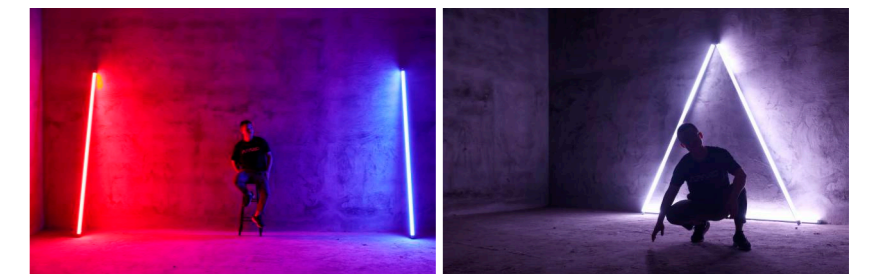



Meteor 60/60L/60LS Four-lights kit



PJ-TZ Patchwork accessories kit



Creativity, infinite imagination

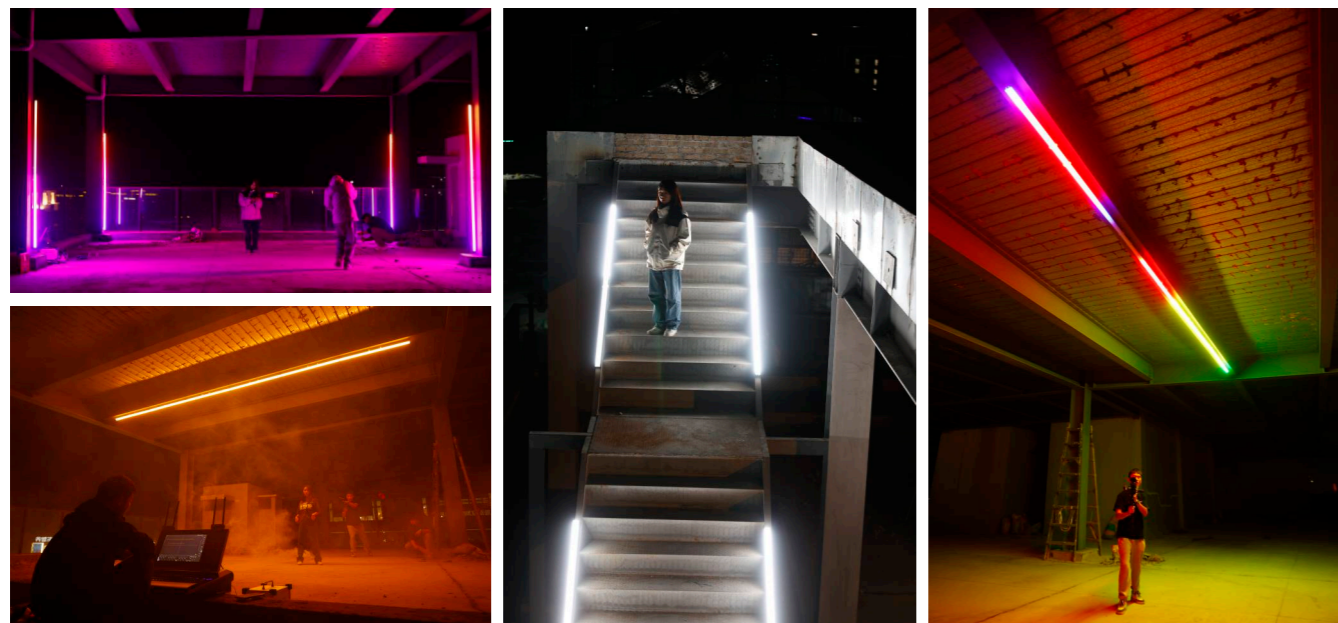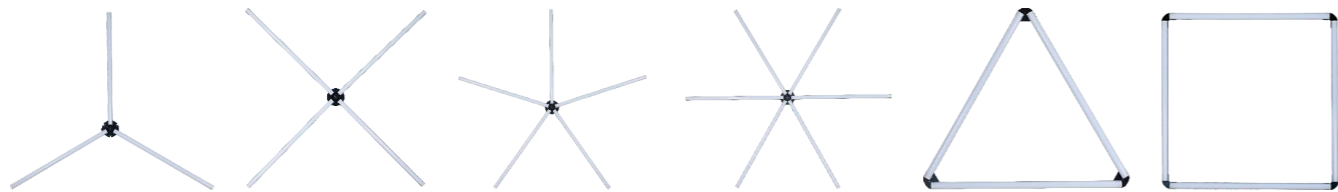

Specifications

Model No.	2.4G Module	Meteor 30	Meteor 60	Meteor 120	Meteor 240
	Lumenradio Module		Meteor 60L	Meteor 120L	Meteor 240L
	Lumenradio Module Montage Series		Meteor 60LS	Meteor 120LS	
LEDs &Power		30pcs < White> 30pcs < Yellow> 30pcs < RGB>	60pcs < White> 60pcs < Yellow> 60pcs < RGB>	120pcs < White> 120pcs < Yellow> 120pcs < RGB>	240pcs < White> 240pcs < Yellow> 240pcs < RGB>
Pixel points		The highest controllable pixels are 30	The highest controllable pixels are 60	The highest controllable pixels are 120	The highest controllable pixels are 240
Output Wattage		10W	20W	40W	80W
Dimming		0-100% Step-less dimming	0-100% Step-less dimming	0-100% Step-less dimming	0-100% Step-less dimming
Color Temperature		2000K-20000K	2000K-20000K	2000K-20000K	2000K-20000K
CRI		96	96	96	96
Operating Voltage		Type-C 5V 2A	DC 19.8V 2A	DC 19.8V 4A	DC 19.8V 8A
Compatibility		Type-C	AC Adaptor	AC Adaptor	AC Adaptor
Battery Capacity		7.2V 23Wh	10.8V 46Wh (Meteor 60) 14.8V 35Wh (Meteor 60L) 10.8V 46Wh (Meteor 60LS)	14.4V 92Wh	14.4V 184Wh
Operating Time (5600K/100%)		120min Normal mode 160min Power-saving mode 210min Ultra-long power-saving 350min Deep power-saving	120min Normal mode 160min Power-saving mode 210min Ultra-long power-saving 350min Deep power-saving	120min Normal mode 160min Power-saving mode 210min Ultra-long power-saving 350min Deep power-saving	120min Normal mode 160min Power-saving mode 210min Ultra-long power-saving 350min Deep power-saving
Connector		Type-C	DMX (MINI XLR 5-PIN)	DMX (MINI XLR 5-PIN)	DMX (MINI XLR 5-PIN)
Control Function		1、Key 2、APP(DeSal Lite+)	1、Key 2、APP (DeSal Lite+、Luminair) 3、DMX/CRMX	1、Key 2、APP (DeSal Lite+、Luminair) 3、DMX/CRMX	1、Key 2、APP (DeSal Lite+、Luminair) 3、DMX/CRMX
Dimensions		Φ48 x 322mm	Φ48 x 684mm	Φ48 x 1278mm	Φ48 x 2460mm
Weight		0.45kg	0.83kg	1.87kg	3.73kg
Lux (0.5/1/2m) 100%	2000K	426 / 104 / 28	760 / 225 / 60	1040 / 355 / 116	1050 / 426 / 171
	5600K	646 / 156 / 42	1200 / 361 / 95	1620 / 543 / 181	1640 / 688 / 274
	20000K	543 / 133 / 36	914 / 273 / 74	1270 / 446 / 141	1250 / 528 / 211
Footcandles (0.5/1/2m) 100%	2000K	40 / 10 / 3	71 / 21 / 6	97 / 33 / 11	98 / 40 / 16
	5600K	60 / 15 / 4	112 / 34 / 9	151 / 50 / 17	152 / 64 / 25
	20000K	50 / 12 / 3	85 / 25 / 7	118 / 41 / 13	116 / 49 / 20